



Extremely sophisticated modular model applicable to Z & U Sheet Piles

SIENT PILERTM F401


Flexible and Functional Formula

The F401 features a new modular design developed by optimising all the parts and drastically modifying the structure, shape, and material.

Not only are the main component parts more versatile, it is also equipped with a cutting-edge control system, and realising high functionality and longer operation life.

Optimising Work Efficiency with Modular Design

SILENT PILER F401 is applicable to Standard, Water Jetting, and Super Crush press-in works by changing the chuck and chuck frame, and equipping attachments. The machine can be utilised more efficiently because it is adjustable to various soil conditions and working conditions.

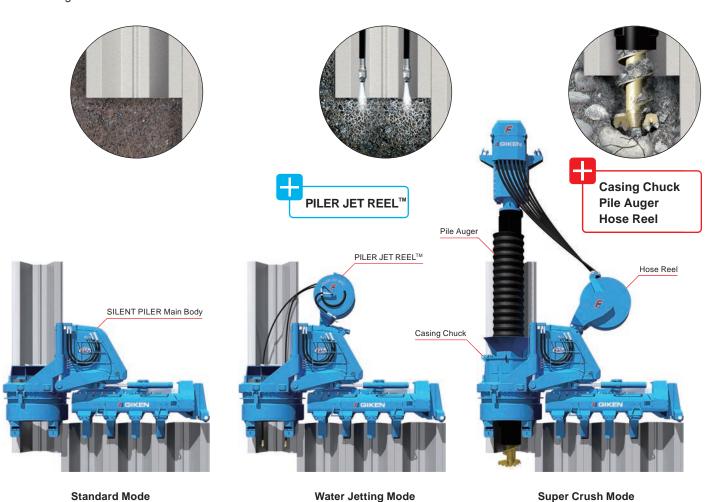


25 50 SPT N Values

2 New Control System

The new control system manages the position of the press-in machine and controls load generation from press-in work during operation, maximising the durability of each part. Also, control of the machine is remarkably improved by the Press-in Force Control System and the Phaseless Linear Auger Torque Control System.




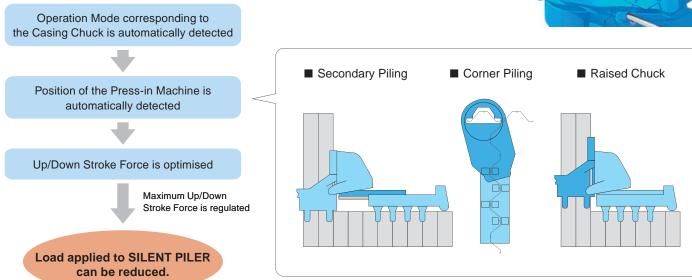

3 Multi-position clamps


The clamp pitch is adjustable to multiple positions by using hydraulic system for over 40 types of sheet pile without disassembly.



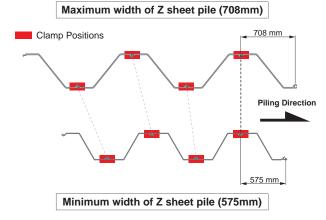

4 For Wider Z & U Sheet Piles

The F401 has been designed to press-in 2 piles simultaneously up to a total width of 1416mm.

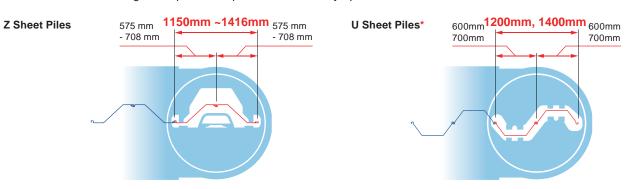


^{*} F401 is designed to Press-in a pair of 600mm and 700mm U sheet piles in pairs by using WU chuck attachment.




5 Pile Installation into Hard Ground


The "Pilot Coring Theory", GIKEN original theory, makes the Hard Ground Press-in Method able to install sheet piles into difficult ground conditions such as gravelly soil and cobble or boulder mixed soil without losing the advantages of the Press-in Method. The augering area can be reduced to assist pile installation, minimising volume of spoil and disturbance to the soil strata. Hence, high bearing capacity is available from sheet piles which are installed by the Hard Ground Press-in Method.

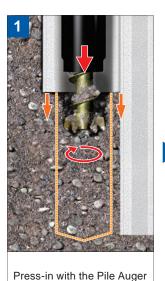




Extracting the Pile Auger after completion of sheet pile installation

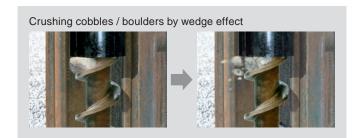


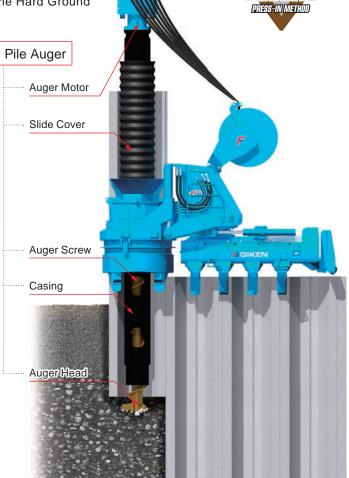

Locking Function

Lock functions in the leader mast, chuck and clamps secure SILENT PILER against drilling torque and increase drilling efficiency and accuracy of pile installation.

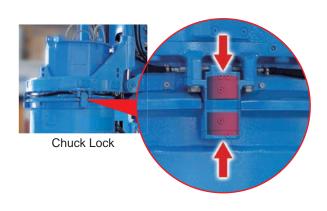

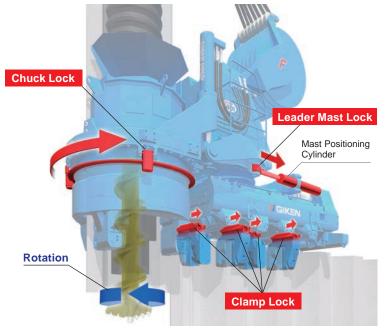

New Generation Power Unit EU300L5

Low Emission Engine

The Power Unit of the F401 is a new generation model and has environmentally-friendly specifications. It is designed with strict concepts for clean emissions with high combustion efficiency and GIKEN original hydraulic control technologies.

Ultra Low Noise Level

It clears allowable construction noise levels in many industrialised countries.

Standard Application of Biodegradable Oil

The F401 uses bio-degradable PILER ECO™ OIL and PILER ECO Grease. Hence, if hydraulic oil or grease is spilled into soil or water, there will be no environmental damage to the surrounding ecosystem. In addition, the machines are painted with TX-Free non-leaded paint*.

* Environmentally-friendly paint which does not contain toluene, xylene and lead based pigment.





7 Scientific Execution of Press-in Work & Advanced IT Functions


GIKEN IT System

GIKEN engineers can monitor individual SILENT PILER, such as operating condition, maintenance records and location. Quick advice for any technical troubles is available promptly and appropriate information can also be provided to prevent troubles.

* The system is not available in the countries where authorisation for usage cannot be acquired.

Press-in Monitoring and Data Logging System


Press-in monitoring data can be used for quality control and information modelling of the foundation. Operators are able to keep working while checking data such as press-in force, auger torque, and working hours of press-in work, on a tablet or PC (both optional extras).

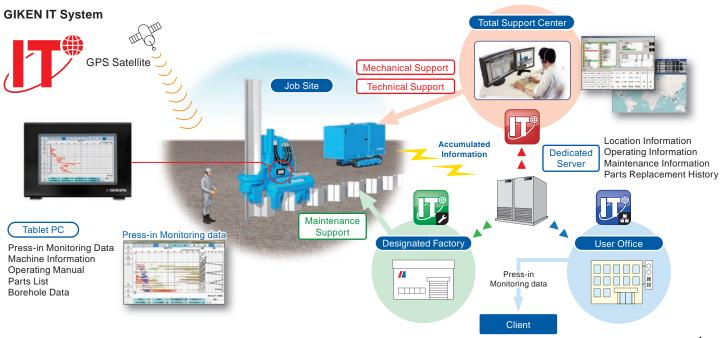


3



Dimensions & Specifications

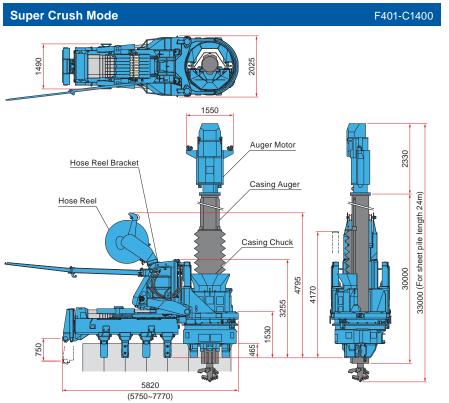

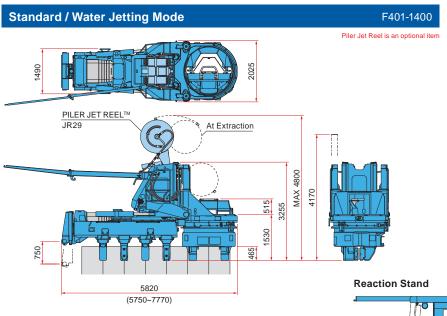

| SILE | NT PILER | F40 |
|-----------------------------------|---|---|
| Applicable sheet piles | | Z Sheet Piles 575~708 mm U Sheet Piles 600, 700 mm with WU Chuck Attachment |
| Max. Press-in Force | | 1200 kN (Super Crush Mode) |
| | | 1500 kN (Standard / WJ Mode) |
| Max. Extraction Force | | 1600 kN |
| Stroke | | 1000 mm |
| Press-in Speed | | 1.3 ~ 27.0 m/min (Standard Mod |
| Extraction Speed | | 1.0 ~ 20.2 m/min (Standard Mod |
| Control System | | Radio Control |
| Movement | | Self-Moving |
| Mass | Super Crush Mode (Main Body, Hose Reel, Ca | asing Chuck) 30670 |
| | Water Jetting Mode (Main Body, Piler Jet Reel) | 26850 |
| | Standard Mode (Main Body) | 25600 |
| Hose Reel | | HR17 |
| Mass (Standard) | | 2770 kg (including Hose Reel Bracket) |
| Pile A | uger | PA2 |
| Applicable pile length (Standard) | | Max 24 m* |
| Mass | Auger Motor | 2540 kg |
| | Casing Auger | 18260 kg |
| Total N | Mass | 20800 kg |
| | | *Up to 30m with modificati |
| PILEF | R JET REEL™ | JR2 |
| Applicable pile length | | Standard 16.0 m (Max. 27.0 |
| Mass | | 1250 kg |
| Power Unit | | EU300L |
| Power Source | | Diesel Engine |
| Rated Output | | 255 kW / 1800 min ⁻¹ |
| Fuel Tank Capacity | | 500 L |
| Hydraulic Reservoir | | 490 L (PILER ECO™ OIL) |
| AdBlue®/DEF Tank Capacity | | 57 L |
| Total Mass | | 7250 kg |
| | tion Stand (with Le | veling Jack) |
| React | ion otana (with Le | voiling ducity |

Accessories

Accessaries are different of types.

■ Basic Accessories









HOSE ROLLER™


PILE LASER™

Module Box

Tablet PC (encased)








Chuck Stage


WU Chuck Attachment

PILER JET REEL™ (JR29)

PILER STAGE™

■ Super Crush Mode Accessories









Auger Head

Auger Head Replacement Attachment

PILER STAGE with Chuck Stage

Power Unit

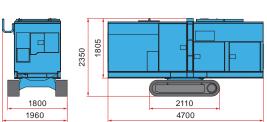

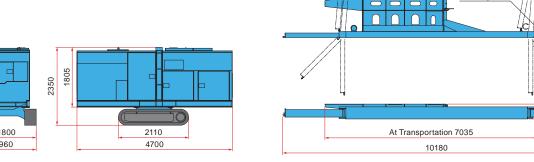

5 6



Construction Solutions Company

www.giken.com

CONTACT US



"SILENT PILER" is a registered trademark or trademark of GIKEN LTD. in the United States and other countries.