
## **Spreader Beam**

## Pitching Tubular Piles without Kink for Safe and Efficient Piling



The Spreader Beam can prevent kink, wear or damage on sling wire ropes. It makes pitching work safer and more efficient. The lightweight and compact spreader beam can be used for 2 to 4 different diameter piles.

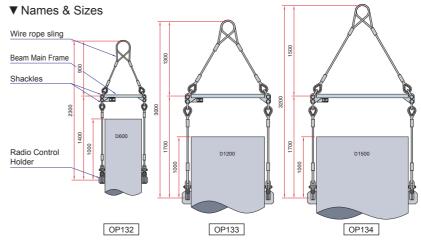

\* The above figures are reference only. They might be different from at site.

## Specifications

	OP132	OP133	OP134
Applicable Pile Diameter	D500 - D609.6	D700 - D1219.2	D1200 - D1524
Max. Load	5 ton	10 ton	10 ton
Mass*	25 kg	71 kg	75 kg

\*Including the beam main frame, 4 wire rope slings and 4 shackles. (Excluding radio control holder)



© 2010 GIKEN LTD. All Rights Reserved.

www.giken.com