



Dimensions & Specifications


3-Clamp

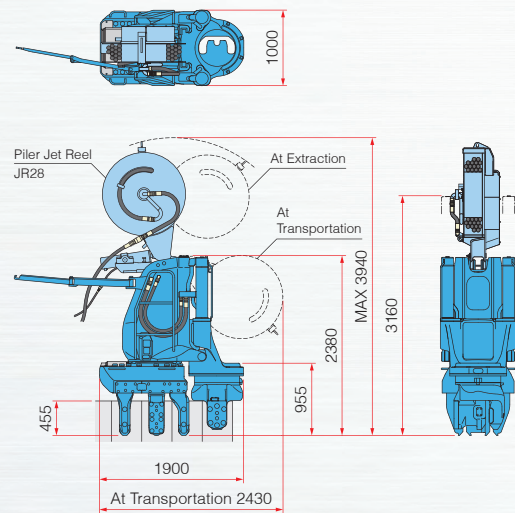


4-Clamp

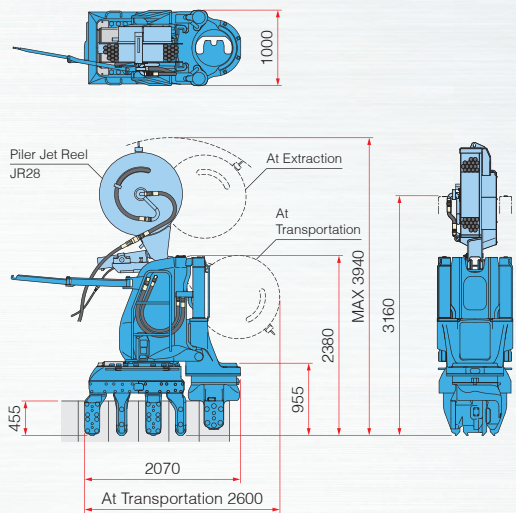

Power Unit

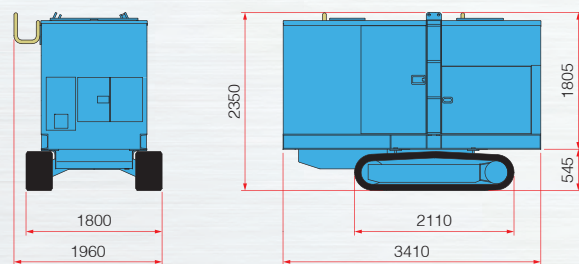

Reaction Stand

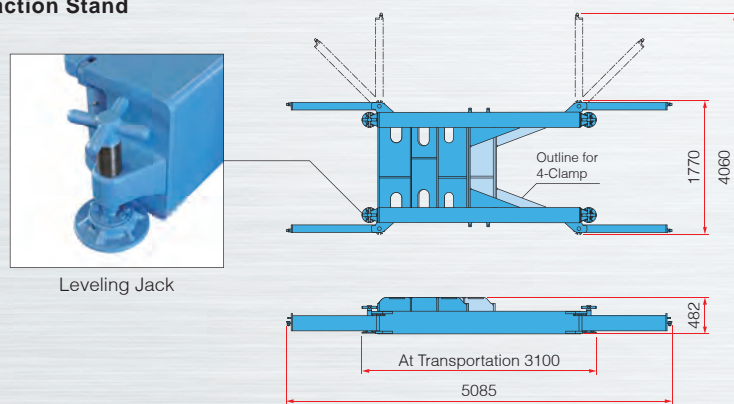

SILENT PILER F101

Applicable sheet piles	U Sheet Pile 400mm wide SPII, III, IV
Max. Press-in Force	800 kN
Max. Extraction Force	900 kN
Stroke	800 mm
Press-in Speed	2.5 ~ 35.7 m/min
Extraction Speed	1.9 ~ 26.9 m/min
Control System	Radio Control

Mass	Water Jetting Mode	3-Clamp	6220 kg
	(Main Body & Piler Jet Reel)	4-Clamp	6620 kg
	Standard Mode	3-Clamp	5400 kg
	(Main Body)	4-Clamp	5800 kg

Piler Jet Reel JR28

Applicable pile length	Standard 17.0 m (Max. 27.0 m)
Mass	820 kg

Piler Jet Reel is an optional item

Power Unit EU200I3

Power Source		Diesel Engine
Rated Output	Power Mode	195 kW (265 ps) /1800 min ⁻¹
	Eco Mode	173 kW (235 ps) /1600 min ⁻¹
	Super Eco Mode	152 kW (207 ps) /1400 min ⁻¹
Fuel Tank Capacity		400 L
Hydraulic Reservoir		Piler ECO Oil 490 L
Moving Speed		1.4 km/h

Reaction Stand (with Leveling Jack)

Mass	3-Clamp	1200 kg
	4-Clamp	1300 kg

The above specifications are subject to alteration without prior notice.



SILENT PILER F101

for U Sheet Piles
400mm wide



Construction Solutions Company

www.giken.com

CONTACT US



"SILENT PILER" is a registered trademark or trademark of GIKEN LTD. in the United States and other countries.

© 2014 GIKEN LTD. All Rights Reserved.

Ver 1.2EN05 / 07 Jun 2023

Extremely Sophisticated Modular Model for 400mm U Sheet Pile

SILENT PILER F101

Silent Piler F101

Flexible and Functional Formula

The F101 features a new modular design developed by optimising all the parts and drastically modifying the structure, shape, and material.

Not only are the main component parts more versatile, it is also equipped with a cutting-edge control system, and realising high functionality and longer operation life.

3-Clamp Total Mass*1 **12.4t***2


4-Clamp Total Mass*1 **12.9t***2

*1 Silent Piler Main Body, Power Unit, Reaction Stand
*2 In Metric System



1 Longer Operational Life and Higher Functionality by New Control System

The new control system manages the position of the press-in machine and controls load generation from press-in work during operation, maximising the durability of each part. Also, control of the machine is improved by the Press-in Force Control System.

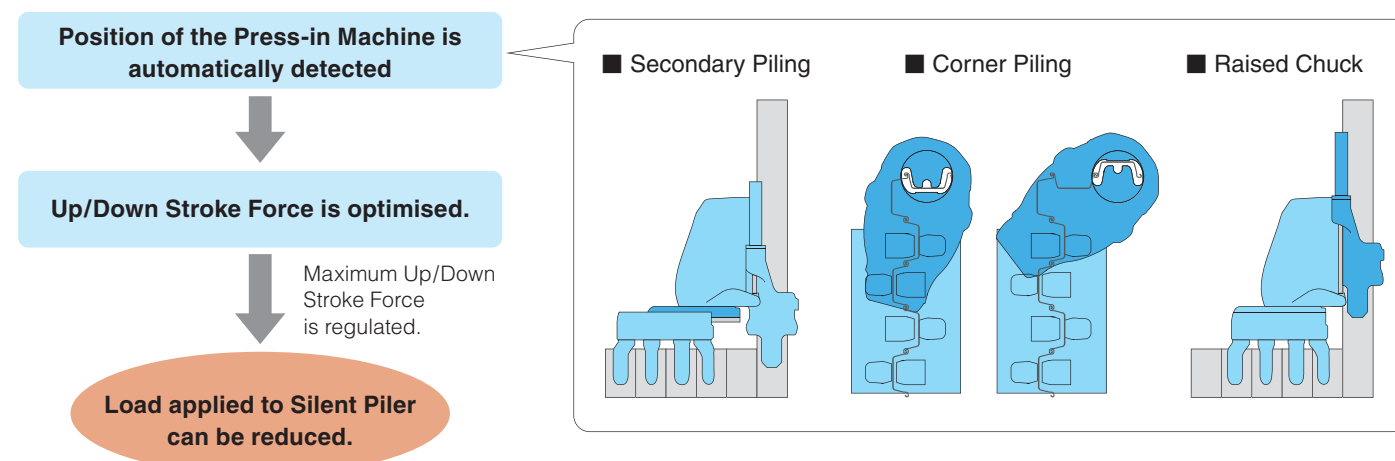

2 Outstanding Environmentally-Friendly Design


Low Emission Engine

The Power Unit of the F101 is a new generation model and has environmentally-friendly specifications. It is designed with strict concepts for clean emissions with high combustion efficiency and GIKEN's original hydraulic control technologies.



Ultra Low Noise Level

It clears allowable construction noise levels in many industrialised countries.

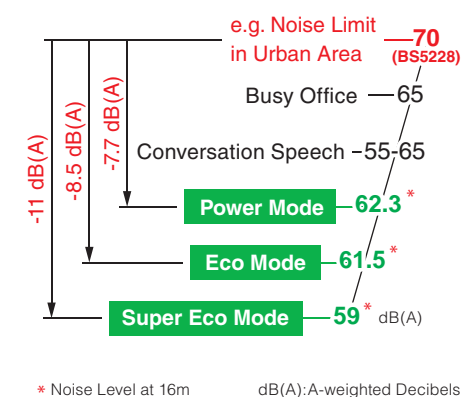

Standard Application of Biodegradable Oil

The F101 uses bio-degradable Piler Eco Oil and Piler Eco Grease. Hence, if hydraulic oil or grease is spilled into soil or water, there will be no environmental damage to the surrounding ecosystem. In addition, the machines are painted with TX-Free non-leaded paint*.

* Environmentally-friendly paint which does not contain toluene, xylene and lead based pigment.



3 Scientific Execution of Press-in Work & Advanced IT Functions

GIKEN IT System

GIKEN's engineers can monitor individual Silent Pilers, such as operating condition, maintenance records and location. Quick advice for any technical troubles is available promptly and appropriate information can also be provided to prevent troubles.

* The system is not available in the countries where authorisation for usage cannot be acquired.

Press-in Monitoring and Data Logging System

Press-in monitoring data can be used for quality control and information modelling of the foundation. Operators are able to keep working while checking data such as press-in force and working hours of press-in work, on a tablet or PC (both optional extras).

